


Customer	Job Site
-----------------	-----------------

Project Summary


Tab	#Rooms	#Stairs	Floor Area	Wall Area	Base Peri	#Doors	#Windows
cave_creek_medical_center	28	0	3,895.32 SF	12,420.03 SF	1140'10"	27(81'0")	0

Item Description	Usage	Linear Length	Net Area	Base Peri	Seam Length	Waste*
Bullnose 3" LF	74.7 LF		74.7 LF			0.0%
CAR 12'0" (6" x 6") SY	86.50 SY (778.53 SF)	12'0"x64'11"	58.46 SY (526.18 SF)	171'10"	12'1"	32.4%
Corner Guard EA	39.0		39.0			0.0%
CT 3" x 6" SF	340.00 SF (37.78 SY) (17*20SF/Box) (2720PCs)		317.31 SF (35.26 SY)	0"		7.2%
Heat Weld 0" LF	390.5 LF		390.5 LF			0.0%
RB 4" LF	1,149.5 LF		1,149.5 LF			0.0%
SC SF	94.51 SF (10.50 SY)		94.51 SF (10.50 SY)	36'0"		0.0%
Self Cove labor 6" LF	74.7 LF		74.7 LF			0.0%
SV 6'6" SF	3,844.61 SF (427.18 SY)	6'6"x591'6"	3,243.02 SF (360.34 SY)	974'5"	390'6"	15.6%
TR-002 4" LF	4.3 LF		4.3 LF			0.0%


* For roll products, the waste is waste ratio; for others, the waste is waste addon.



	Bullnose 3" LF
	CAR 12'0" (6" x 6") SY
	Corner Guard EA
	CT 3" x 6" SF
	Heat Weld 0" LF
	RB 4" LF
	SC SF
	Self Cove labor 6" LF
	SV 6'6" SF
	TR-002 4" LF

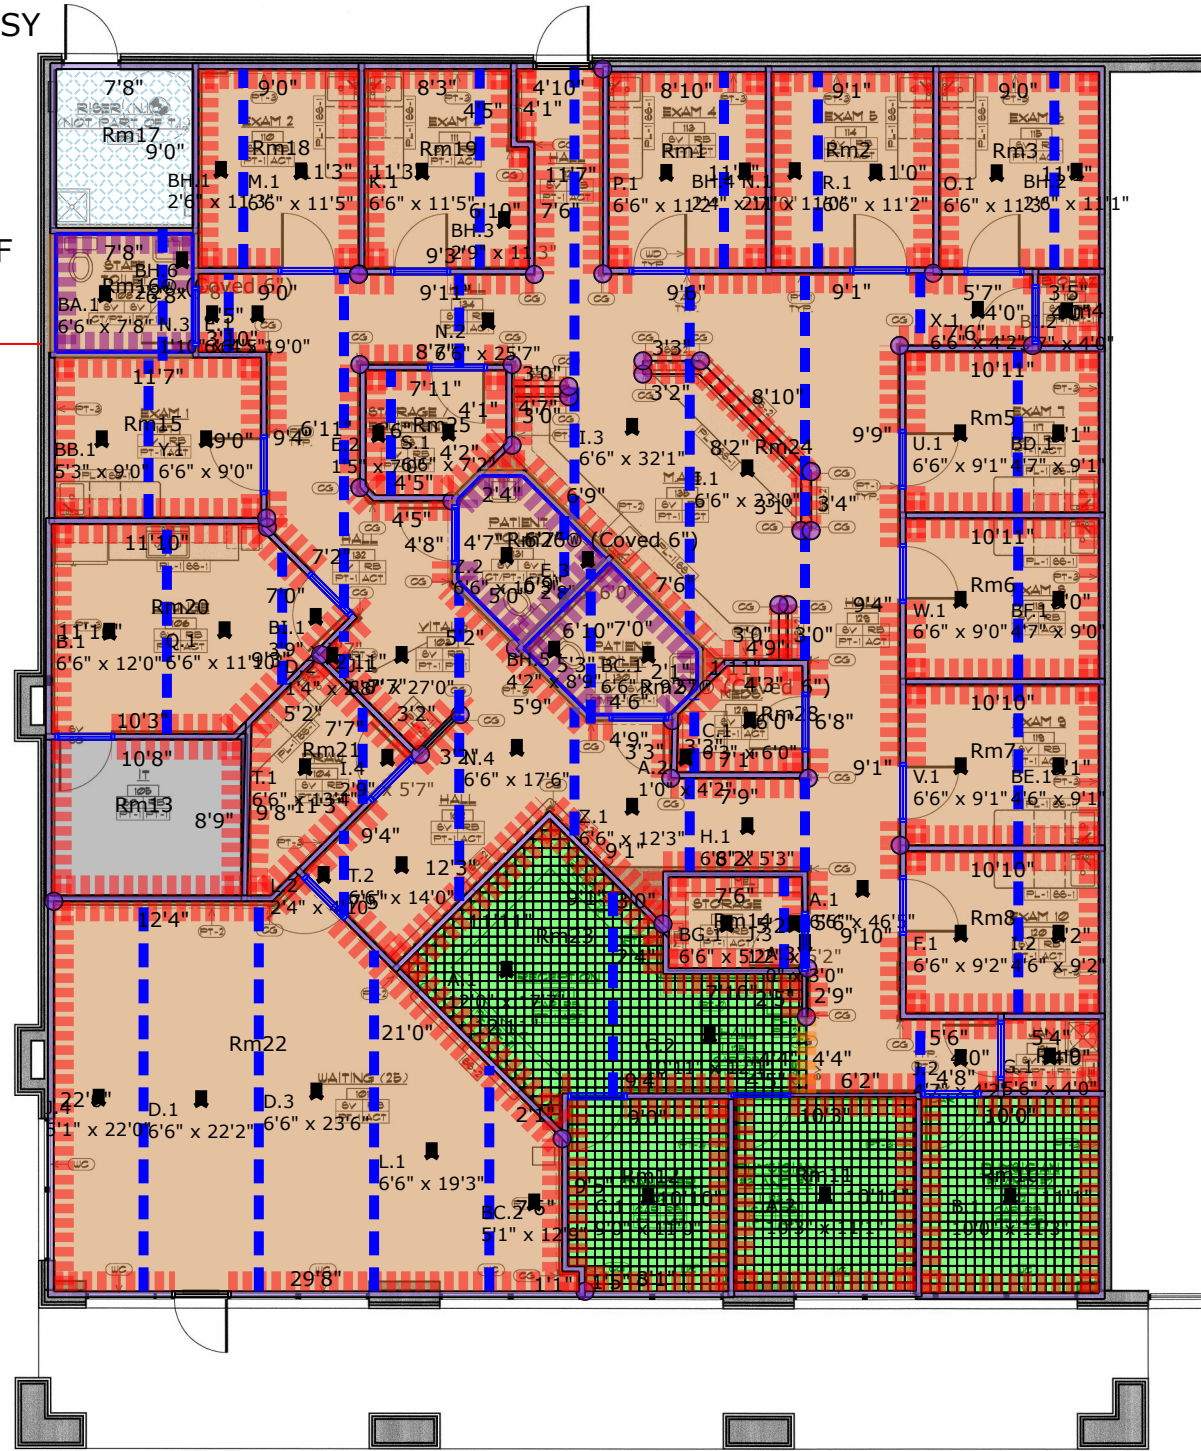

FINISHES PLAN



LEGEND

FINISHES

ROOM NAME	ROOM NAME
10	ROOM NUMBER
1 1	PRIMARY FINISHES
2	SECONDARY FINISHES

KEYNOTE

- AGT ACoustical CEILING TILE: 'ARMSTRONGS' 2'x2' 'CORTEGA' WITH 'REGULAR' EDGES
- AL ALUMINUM; MANUFACTURER: 'TIMELY' COLOR: 'BLACK'
- CAR CARPET; MANUFACTURER: 'QUEEN COMMERCIAL' (SHAW); STYLE: 'VARGON' JOSSA; COLOR: '5509' (SP)
- CG CORNER GUARD; MANUFACTURE: 'INPRO CORP.'; STYLE: 'FEBEN' 2'x2'x48" HIGH SURFACE MOUNT; COLOR: '019' 'WHITE SAND'; PROFILE AS REQUIRED FOR CORNER SITUATION
- CT CERAMIC TILE; MANUFACTURE: 'DALY TILE'; STYLE: '8811' GLOSS '933' 'ALMOND'; N 3" x 6" SIZE INSTALLED HORIZONTALLY IN BRICK PATTERN WITH BULLNOSE TOP; GROUT: 'MAPEI' #4 'BOUTI'; SANDING PER MANUFACTURER'S RECOMMENDATIONS; INSTALL IN TOILET ROOMS OVER BACKER BOARD FROM ABOVE 6" SHEET VINYL BASE TO 8'-0" MINIMUM ON WALLS AND AROUND MIRRORS. ALL GROUT TO BE 1/8" WIDE MAXIMUM.
- MEL MELAMINE; WHITE; INSTALL ON OPEN SHELVING.
- PL-1 PLASTIC LAMINATE 1; MANUFACTURER: 'WILSONART'; STYLE: '153-38' COLOR: 'HUNTINGTON MAPLE'; INSTALL ON ALL CABINET FRONT'S
- PL-2 PLASTIC LAMINATE 2; MANUFACTURER: 'FRONITE'; STYLE: 'A711' COLOR: 'SWISS TIMBER'; INSTALL ON ALL COUNTERTOPS WHICH DO NOT HAVE SOLID SURFACE; INSTALL GROMMETS AS DIRECTED BY JCL
- PT-1 PAINT 1; MANUFACTURER: 'DUNN EDWARDS'; NUMBER: 'DEB204' COLOR: 'DEBERT BUDES'; ALL PAINT TO BE PROCURED FROM BELL ROAD STORE LOCATION
- PT-2 PAINT 2; MANUFACTURER: 'DUNN EDWARDS'; NUMBER: 'DEB234' COLOR: 'SERENE THOUGHT'; ALL PAINT TO BE PROCURED FROM BELL ROAD STORE LOCATION
- PT-3 PAINT 3; MANUFACTURER: 'DUNN EDWARDS'; NUMBER: 'DEB234' COLOR: 'SERENE THOUGHT'; ALL PAINT TO BE PROCURED FROM BELL ROAD STORE LOCATION
- RB RUBBER BASE; MANUFACTURER: 'JOHNSONITE'; STYLE: 'SPECIFY VINYL 680 OR RUBBER 1/8\"
- SC SEALED CONCRETE
- SV SOLID SURFACE 1; MANUFACTURER: 'LG SURFACES'; STYLE: 'HIMACS' COLOR: 'MOONSCAPE QUARTZ' 988; COUNTERTOPS AND INTEGRAL 4\"
- SV-2 SOLID SURFACE 2; MANUFACTURER: 'LG VITRATA'; STYLE: 'SILVER LAKE'; INSTALL AT CHECK - IN AND CHECK - OUT COUNTERS AT RECEPTION AND HIGH COUNTERS AT M.A.S.
- SV-3 SHEET VINYL; MANUFACTURER: 'JOHNSONITE'; STYLE: 'ACCENT WOOD' DESCRIPTION: 'DARK BEECH' COLOR: '1804' COORDINATE W/LOGO COLOR WITH JCL; IN TOILET ROOMS; INSTALL WITH 6\"
- WC WINDOW COVERINGS - OWNER FURNISHED, OWNER INSTALLED
- WD WOOD VENEER; ROTARY CUT, WHITE BIRCH WITH CLEAR FINISH

GENERAL NOTES

1. TESTING / MOISTURE BLOCK, PERFORM MOISTURE TESTS ON SLAB; PROVIDE MOISTURE BLOCK AS REQUIRED
2. FLOORING: FIELD VERIFY EXISTING CONDITIONS; PROVIDE ALL GRINDING, PATCHING AND FILLING AS REQUIRED; FLOAT EXISTING CONCRETE SLAB AS REQUIRED TO PROVIDE SMOOTH LEVEL SUBSTRATE FOR FLOORING; NO CHANGE ORDERS WILL BE ALLOWED FOR FLOOR PREP
3. TRANSITION STRIPS; EDGE TRANSITIONS FOR FLOORING SHALL MEET ADA REQUIREMENTS; INSTALL AT CENTERLINE OF DOOR OPENINGS; INSTALL AT BACKSIDE OF WALLS AT OPENINGS WITHOUT DOORS
4. WALLS; PROVIDE SMOOTH WALL FINISH WITH SQUARE CORNERS AT NEW AND EXISTING GYPSUM BOARD WALLS
5. SPECIFICATIONS; SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION AND REQUIREMENTS



**John C. Lincoln Health Network
Cave Creek Family Medicine
Tenant Improvements**
20330 North Cave Creek Road, Suite 160
Phoenix Arizona 85024




*Matthew Budge Associates
Architects, Inc.*
10105 East Via Linda, Suite 103
Scottsdale, Arizona 85258
Phone: (480) 874-2800 Fax: (480) 874-2844

Revisions:

Date:	11-25-12
Scale:	1/4" = 1'-0"
Drawn by:	R.M.
Approved:	T.H.B.
Job number:	1206
Contents:	FINISHES PLAN


Sheet Number:
A8

NOTICE OF EXTENDED PAYMENT PROVISION
THIS CONTRACT ALLOWS THE OWNER TO MAKE PAYMENT WITHIN 21 DAYS AFTER CERTIFICATION AND APPROVAL OF BILLINGS AND ESTIMATES.




Rm16


- Bullnose 3" LF 25.7 LF
- CT 3" x 6" SF 116.84 SF (12.98 SY) (935PCs)
- Heat Weld 0" LF 7.7 LF
- Self Cove labor 6" LF 25.7 LF
- SV 6'6" SF 76.50 SF (8.50 SY)

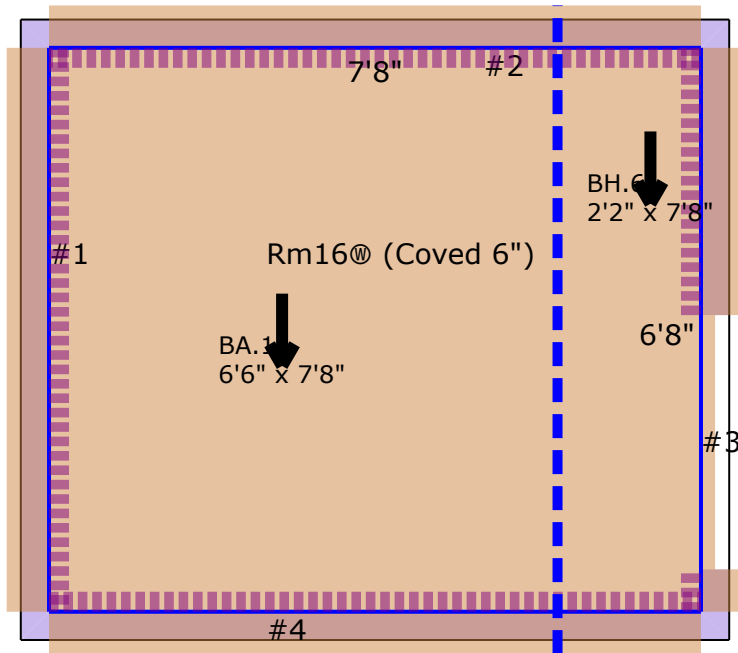


Rm16 #1

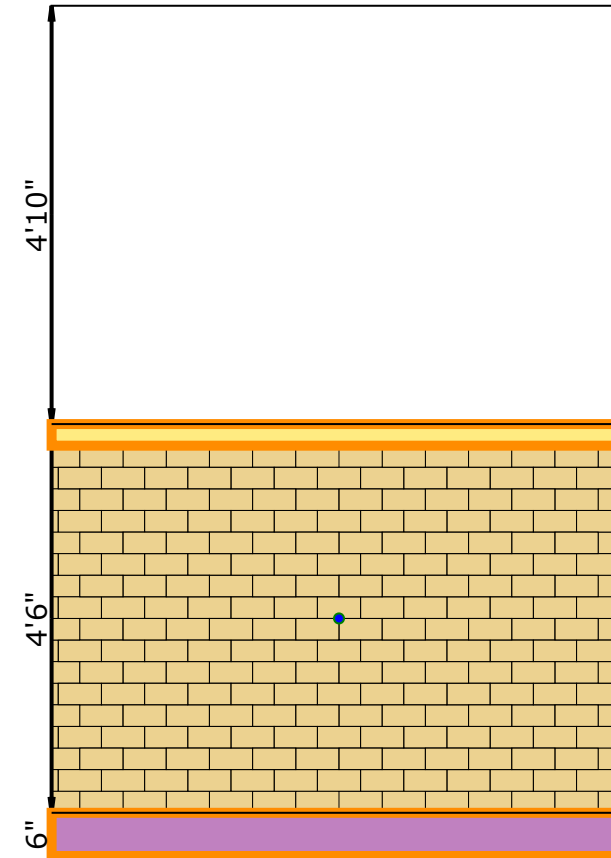


Rm16 #2

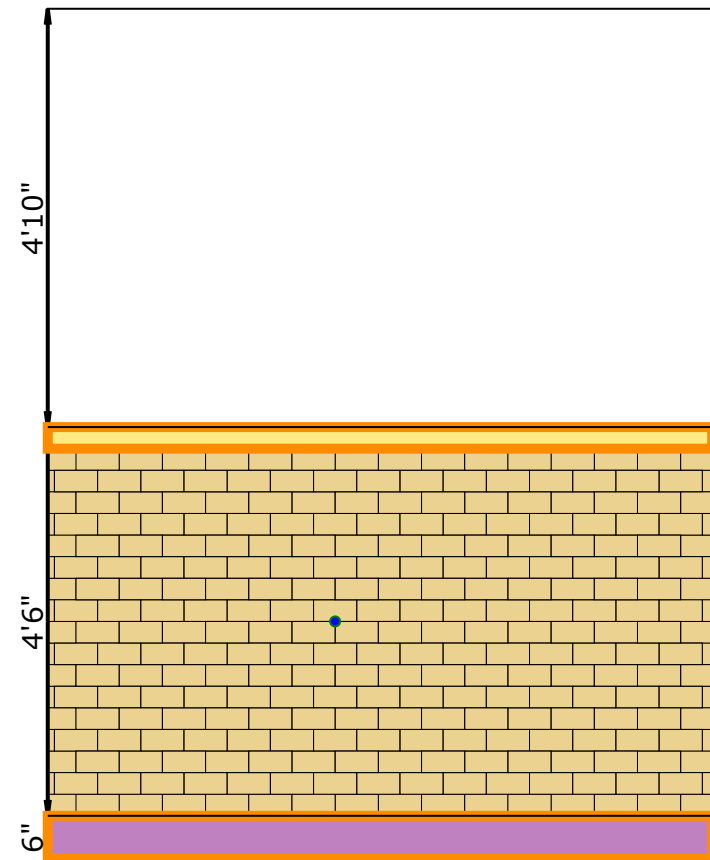


Rm16 #3

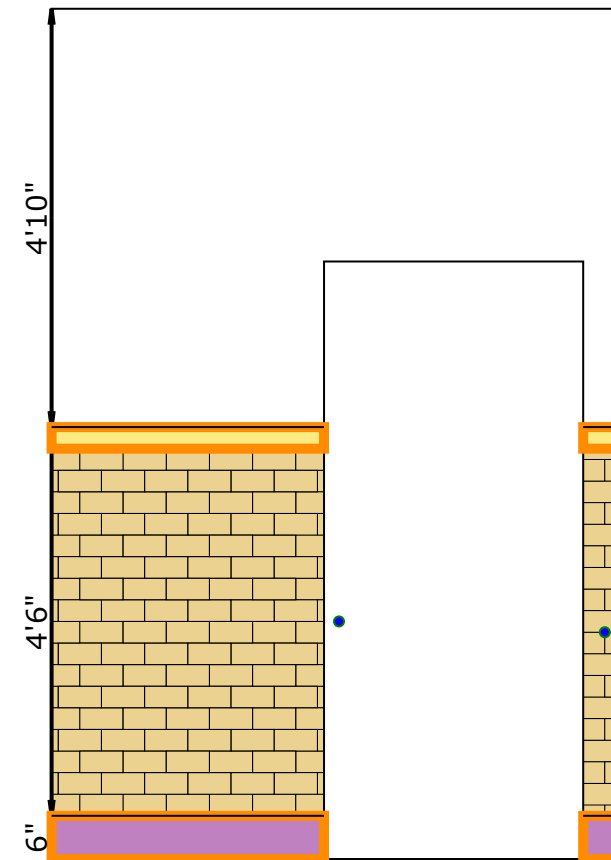




Rm16 #4

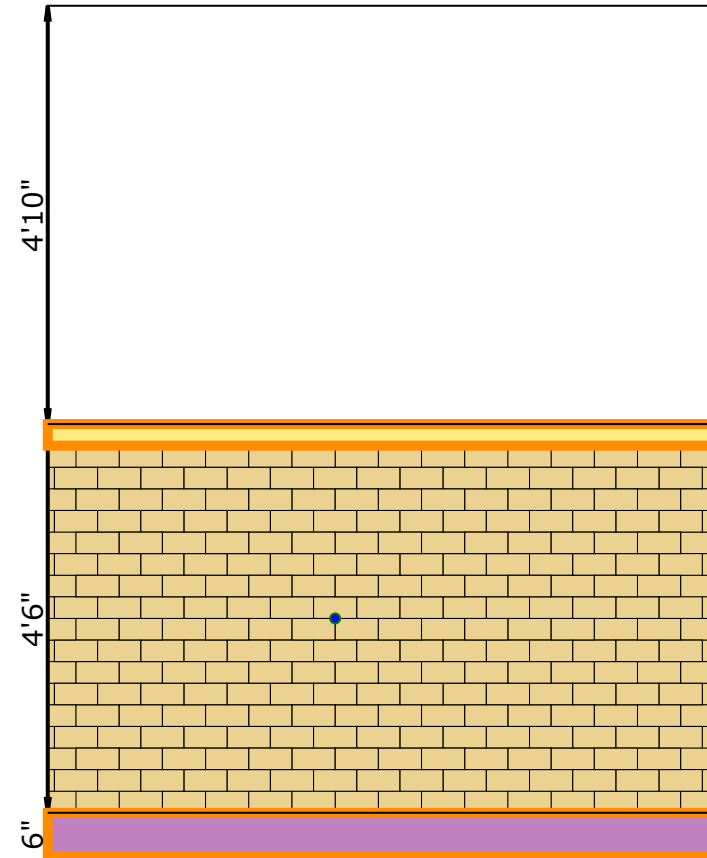


Rm26


- Bullnose 3" LF 24.1 LF
- CT 3" x 6" SF 109.62 SF (12.18 SY) (877PCs)
- Heat Weld 0" LF 6.0 LF
- Self Cove labor 6" LF 24.1 LF
- SV 6'6" SF 72.96 SF (8.11 SY)

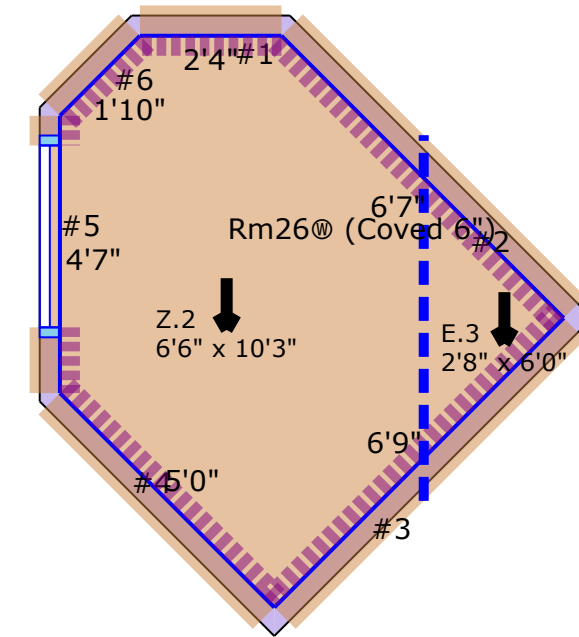


Rm26 #1

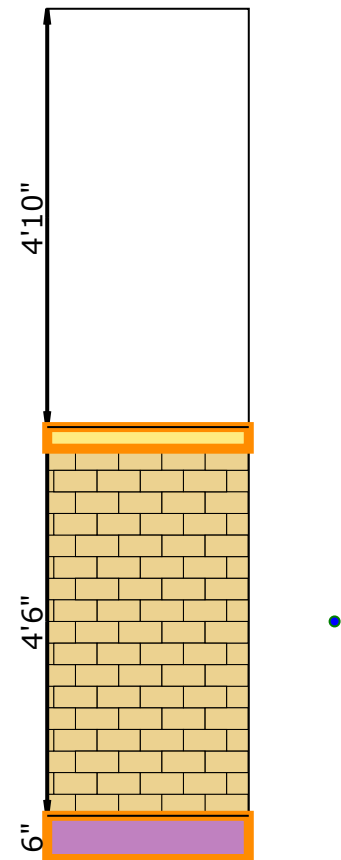


Rm26 #2

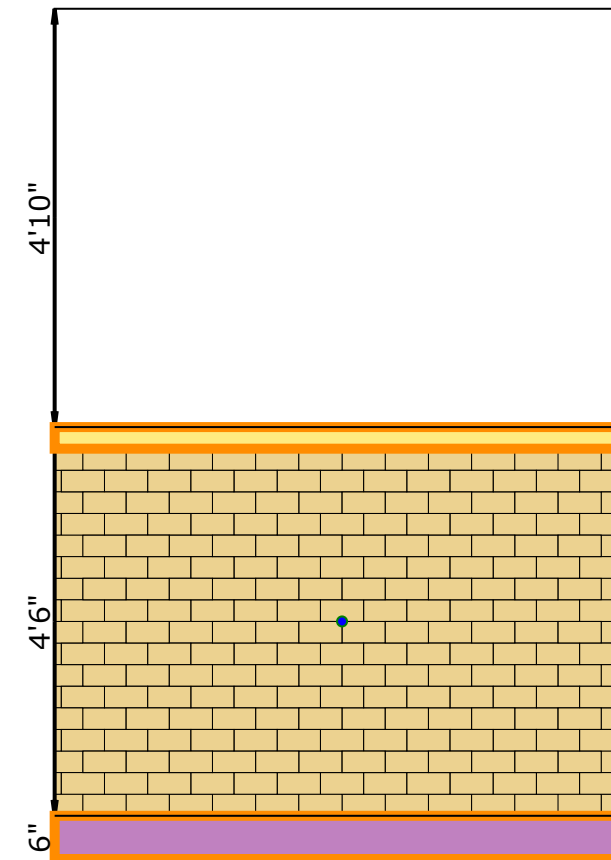





Rm26 #3

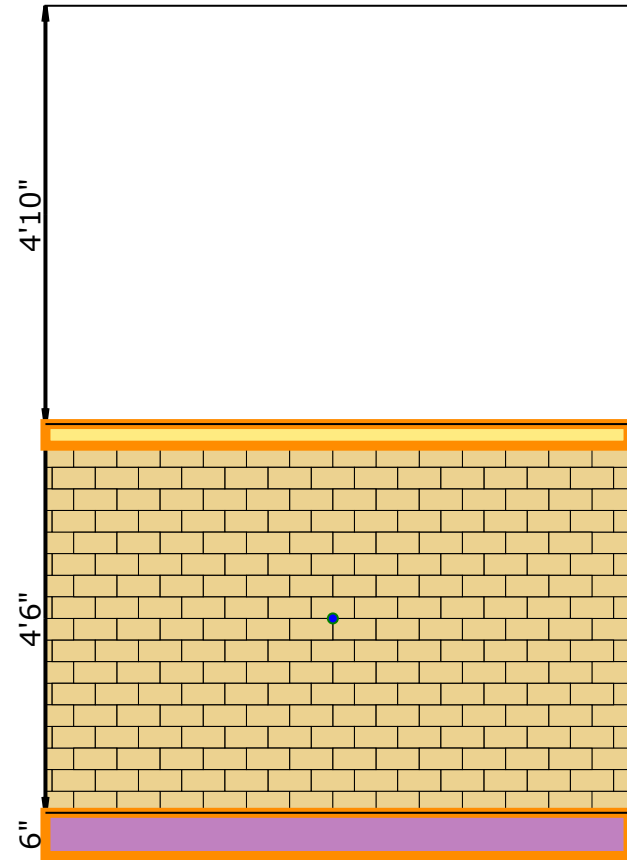


Rm26 #4

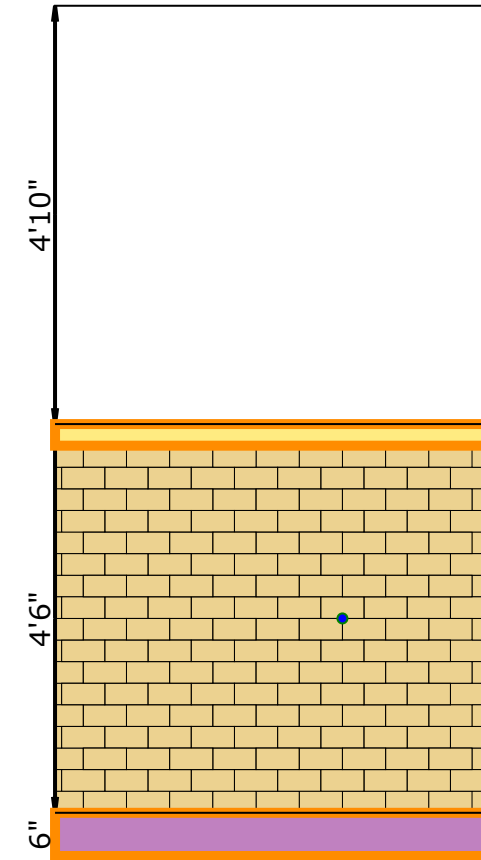


Rm26 #5

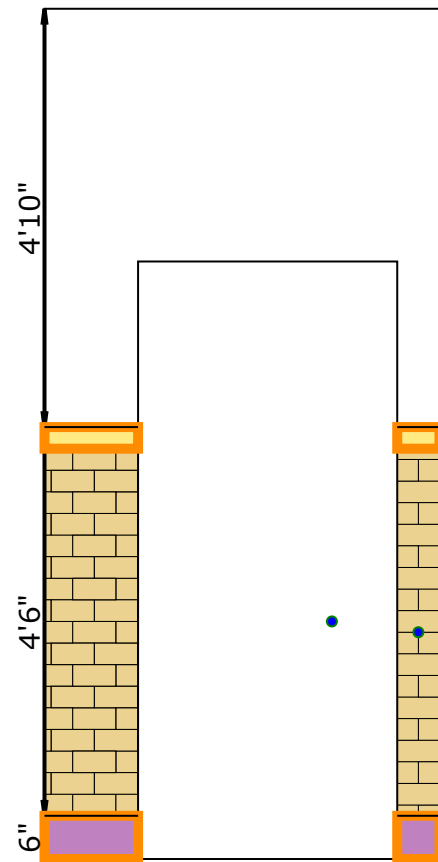


Rm26 #6

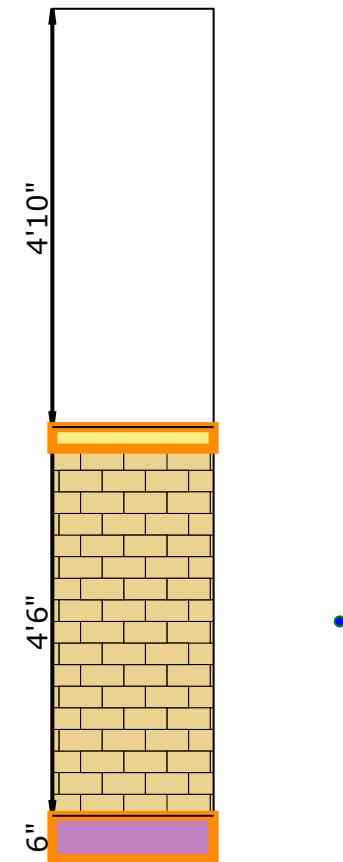




Rm27


- Bullnose 3" LF 24.9 LF
- CT 3" x 6" SF 113.06 SF (12.56 SY) (905PCs)
- Heat Weld 0" LF 8.7 LF
- Self Cove labor 6" LF 24.9 LF
- SV 6'6" SF 76.57 SF (8.51 SY)

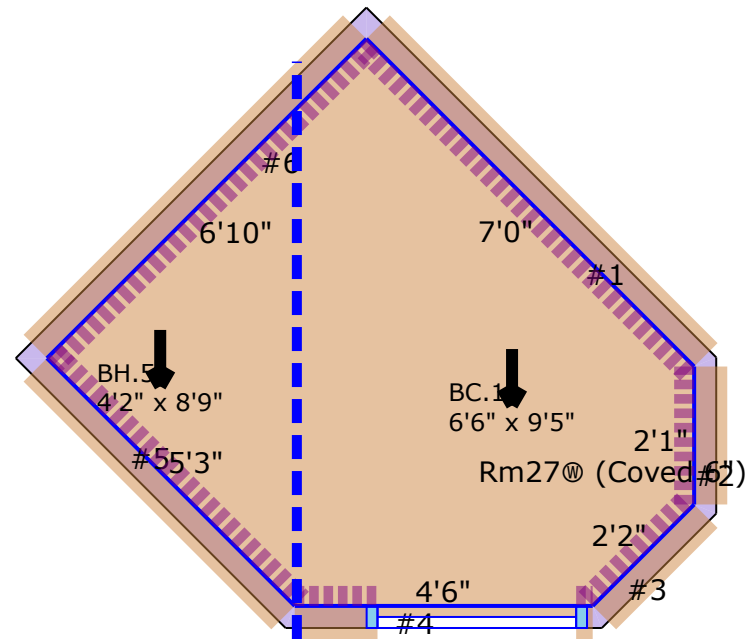


Rm27 #1

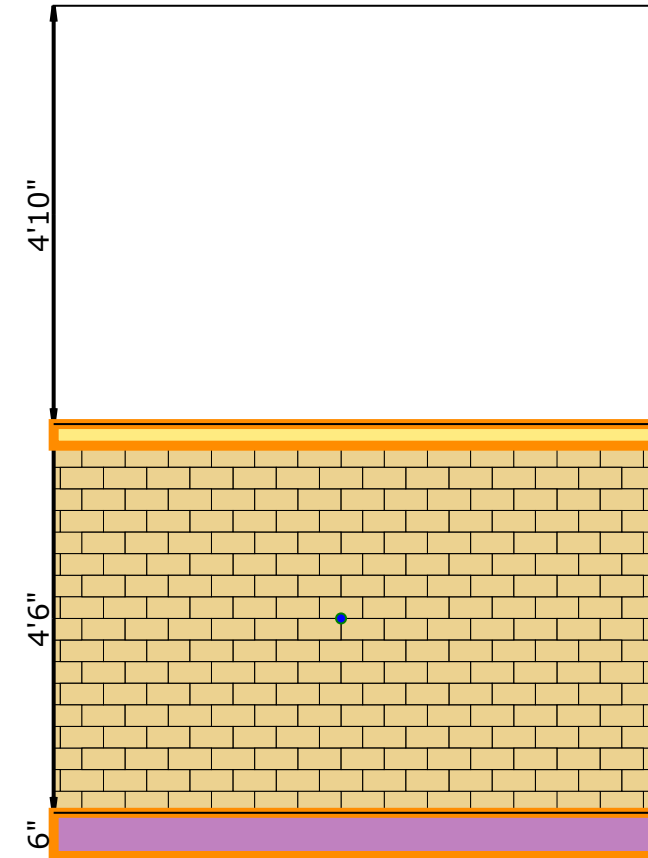


Rm27 #2

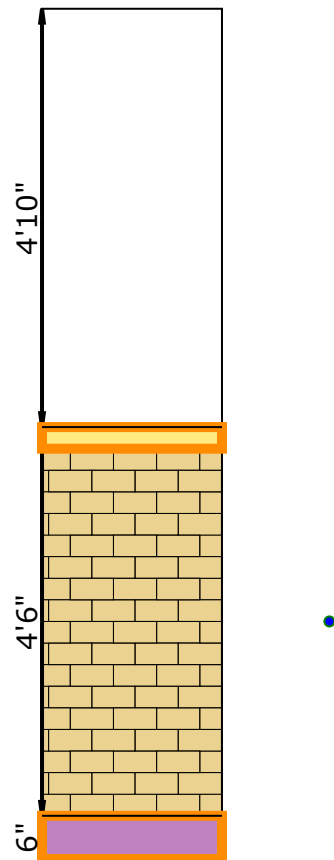


Rm27 #3

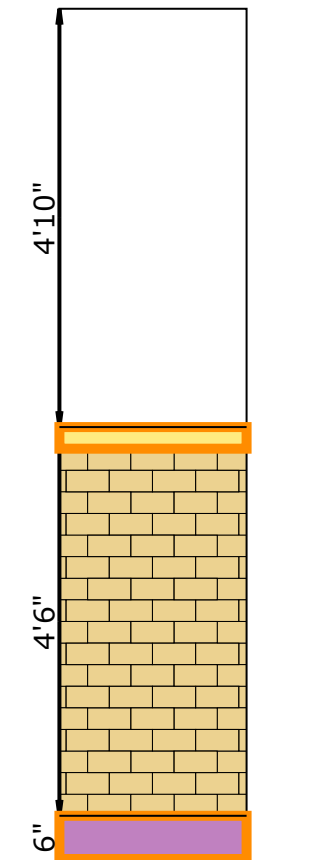





Rm27 #4


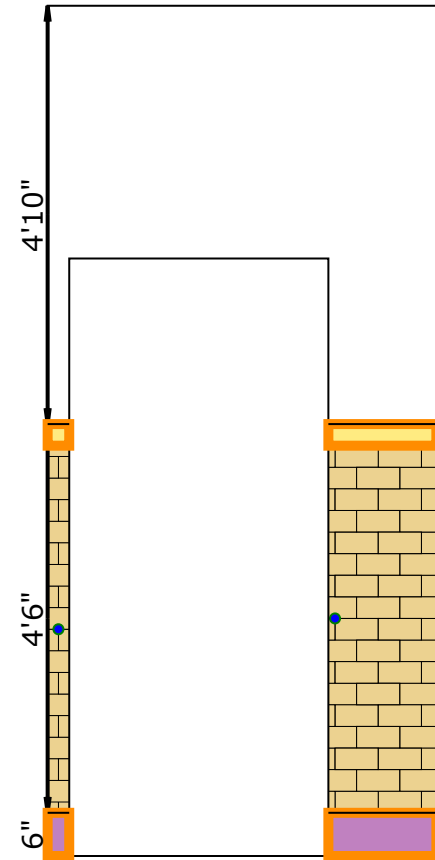



Rm27 #5

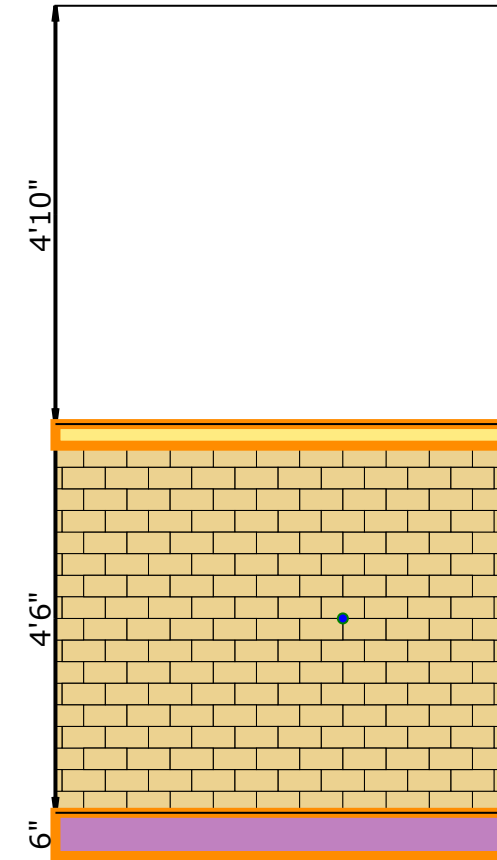

Rm27 #6

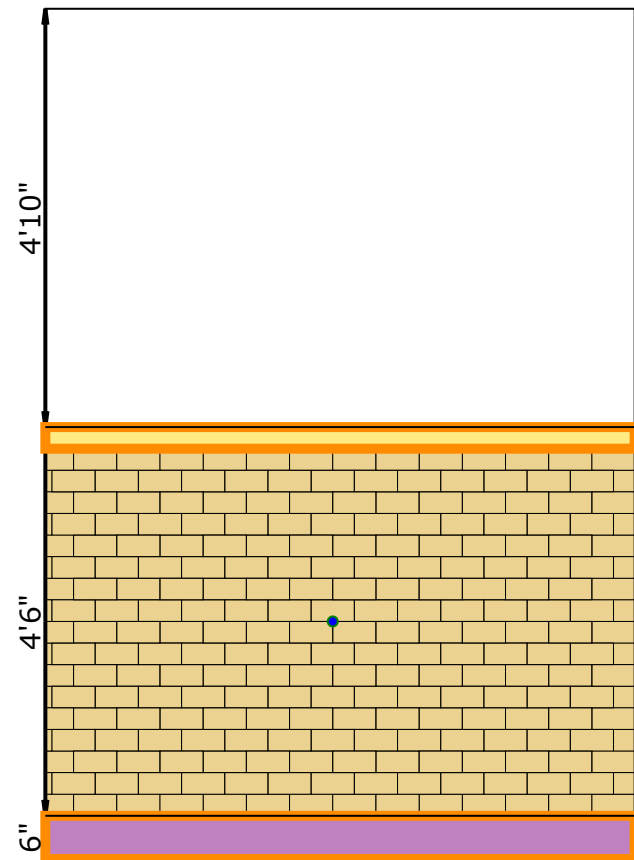

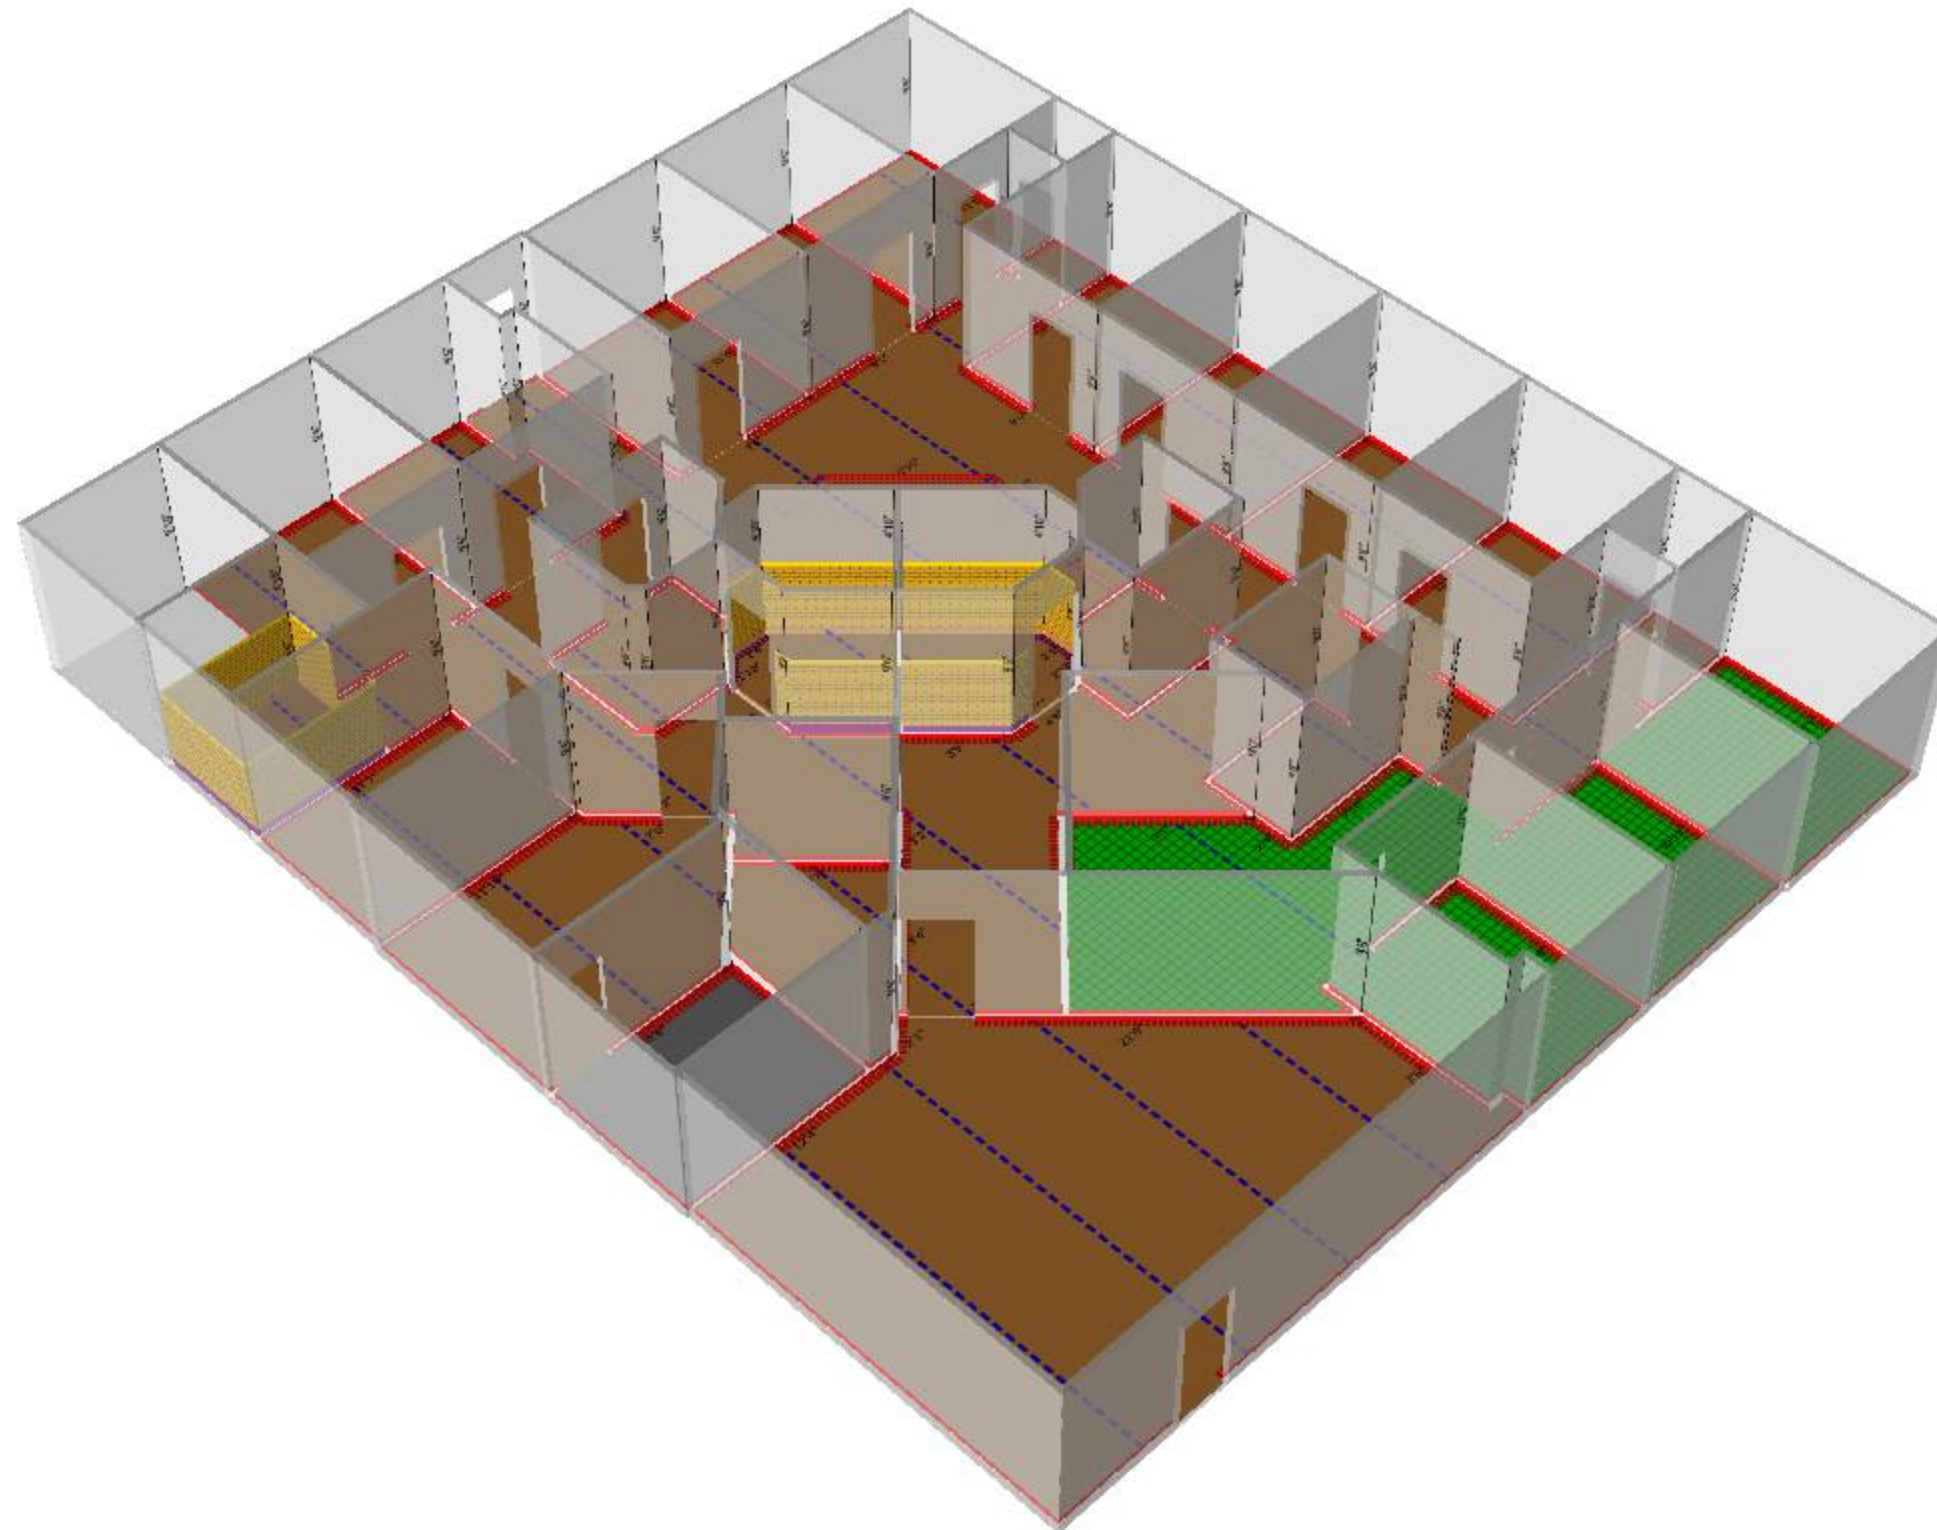



Proposal


BILL TO **SHIP TO**

SKU#/ITEM NO.	DESCRIPTION	QTY UNIT	PRICE	AMOUNT
Bullnose		74.66 LF	\$0.0	\$0.00
CAR		86.50 SY	\$0.0	\$0.00
Corner Guard		39 EA	\$0.0	\$0.00
CT		17 Box	\$0.0	\$0.00
Heat Weld		390.49 LF	\$0.0	\$0.00
RB		1,149.49 LF	\$0.0	\$0.00
SC		94.51 SF	\$0.0	\$0.00
Self Cove labor		74.66 LF	\$0.0	\$0.00
SV		3,844.61 SF	\$0.0	\$0.00
TR-002		4.31 LF	\$5.0	\$21.55
			Material	\$21.55
			Labor	\$0
			Tax SanBernadino 8.0%	\$0.00
			Total	\$21.55

CUSTOMER ACCEPTANCE AND APPROVAL

Print Name **Signature**


Date 10/6/2020 10:10 AM




Proposal

BILL TO **SHIP TO**


SKU#/ITEM NO.	DESCRIPTION	QTY UNIT	PRICE	AMOUNT
cave_creek_medical_center				
Rm1				
	Heat Weld	11.04 LF	\$0.0	\$0.00
	RB	36.79 LF	\$0.0	\$0.00
	SV	116.49 SF	\$0.0	\$0.00
Rm10				
	CAR	18.26 SY	\$0.0	\$0.00
	RB	39.12 LF	\$0.0	\$0.00
Rm11				
	CAR	18.49 SY	\$0.0	\$0.00
	RB	39.35 LF	\$0.0	\$0.00
Rm12				
	CAR	15.96 SY	\$0.0	\$0.00
	Corner Guard	1 EA	\$0.0	\$0.00
	RB	35.79 LF	\$0.0	\$0.00
Rm13				
	RB	35.97 LF	\$0.0	\$0.00
	SC	94.51 SF	\$0.0	\$0.00
Rm14				
	Heat Weld	5.13 LF	\$0.0	\$0.00
	RB	22.26 LF	\$0.0	\$0.00
	SV	46.19 SF	\$0.0	\$0.00
Rm15				
	Heat Weld	9.04 LF	\$0.0	\$0.00
	RB	38.28 LF	\$0.0	\$0.00
	SV	124.92 SF	\$0.0	\$0.00
Rm16				
	Bullnose	25.69 LF	\$0.0	\$0.00
	CT	116.84 SF	\$0.0	\$0.00
	Heat Weld	7.65 LF	\$0.0	\$0.00
	Self Cove labor	25.69 LF	\$0.0	\$0.00
	SV	76.50 SF	\$0.0	\$0.00
Rm18				

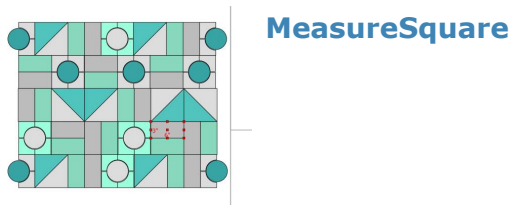

	Heat Weld	11.22 LF	\$0.0	\$0.00
	RB	37.49 LF	\$0.0	\$0.00
	SV	120.62 SF	\$0.0	\$0.00
Rm19				
	Heat Weld	11.25 LF	\$0.0	\$0.00
	RB	38.00 LF	\$0.0	\$0.00
	SV	118.72 SF	\$0.0	\$0.00
Rm2				
	Heat Weld	11.01 LF	\$0.0	\$0.00
	RB	37.24 LF	\$0.0	\$0.00
	SV	119.48 SF	\$0.0	\$0.00
Rm20				
	Heat Weld	19.40 LF	\$0.0	\$0.00
	RB	44.50 LF	\$0.0	\$0.00
	SV	194.72 SF	\$0.0	\$0.00
Rm21				
	Heat Weld	5.58 LF	\$0.0	\$0.00
	RB	32.07 LF	\$0.0	\$0.00
	SV	82.45 SF	\$0.0	\$0.00
Rm22				
	Corner Guard	2 EA	\$0.0	\$0.00
	Heat Weld	75.92 LF	\$0.0	\$0.00
	RB	89.66 LF	\$0.0	\$0.00
	SV	646.32 SF	\$0.0	\$0.00
Rm23				
	CAR	33.79 SY	\$0.0	\$0.00
	RB	56.34 LF	\$0.0	\$0.00
Rm24				
	Corner Guard	36 EA	\$0.0	\$0.00
	Heat Weld	149.92 LF	\$0.0	\$0.00
	RB	307.83 LF	\$0.0	\$0.00
	SV	1,308.49 SF	\$0.0	\$0.00
	TR-002	4.31 LF	\$5.0	\$21.55
Rm25				
	Heat Weld	7.03 LF	\$0.0	\$0.00
	RB	24.84 LF	\$0.0	\$0.00
	SV	61.24 SF	\$0.0	\$0.00
Rm26				

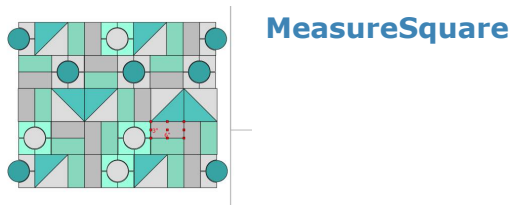

	Bullnose	24.11 LF	\$0.0	\$0.00
	CT	109.62 SF	\$0.0	\$0.00
	Heat Weld	6.03 LF	\$0.0	\$0.00
	Self Cove labor	24.11 LF	\$0.0	\$0.00
	SV	72.96 SF	\$0.0	\$0.00
Rm27				
	Bullnose	24.86 LF	\$0.0	\$0.00
	CT	113.06 SF	\$0.0	\$0.00
	Heat Weld	8.72 LF	\$0.0	\$0.00
	Self Cove labor	24.86 LF	\$0.0	\$0.00
	SV	76.57 SF	\$0.0	\$0.00
Rm28				
	Heat Weld	4.15 LF	\$0.0	\$0.00
	RB	21.47 LF	\$0.0	\$0.00
	SV	46.06 SF	\$0.0	\$0.00
Rm3				
	Heat Weld	11.08 LF	\$0.0	\$0.00
	RB	37.17 LF	\$0.0	\$0.00
	SV	118.86 SF	\$0.0	\$0.00
Rm4				
	RB	11.82 LF	\$0.0	\$0.00
	SV	16.76 SF	\$0.0	\$0.00
Rm5				
	Heat Weld	9.08 LF	\$0.0	\$0.00
	RB	36.96 LF	\$0.0	\$0.00
	SV	117.91 SF	\$0.0	\$0.00
Rm6				
	Heat Weld	9.04 LF	\$0.0	\$0.00
	RB	36.84 LF	\$0.0	\$0.00
	SV	117.18 SF	\$0.0	\$0.00
Rm7				
	Heat Weld	9.07 LF	\$0.0	\$0.00
	RB	36.88 LF	\$0.0	\$0.00
	SV	117.47 SF	\$0.0	\$0.00
Rm8				
	Heat Weld	9.15 LF	\$0.0	\$0.00
	RB	37.04 LF	\$0.0	\$0.00
	SV	118.47 SF	\$0.0	\$0.00



Rm9

RB

15.79 LF

\$0.0

\$0.00

SV

26.23 SF

\$0.0

\$0.00

Material \$21.55

Labor \$0

Tax SanBernadino 8.0% \$0.00

Total \$21.55

CUSTOMER ACCEPTANCE AND APPROVAL

Print Name

Signature

Date 10/6/2020 10:10 AM